

how to install Maestro steps on half landings



this is one of a series of installation guides which cover all aspects of installing Maestro-steps stair cladding all of which are available to download from our website
www.stairmakeoversolutions.co.uk

for further help, advice or information please contact us via e mail
sales@stairmakeoversolutions.co.uk
or phone us on
01507 463129



transform a staircase in a day

simply clad an existing staircase with our premium laminate or real oak veneer treads and risers to create a stunning feature staircase

how to install

Maestro steps on half landings

We do all we can to ensure the accuracy of the advice given but we can not cover all eventualities and it is the installers responsibility to ensure the safe and secure installation of the products in each individual situation-if in doubt consult a professional



For half landings two Maestro step treads can be easily joined together to create a maximum depth of 760mm (using two 1300mm width treads)

If additional depth is required then the tongue and groove landing packs are ideal. These pieces are tongue and grooved on their long edges and just slot into the back of a tread and each other and are easily cut to size to create the required width and depth for your half landing

Joining two treads together

Maestro steps treads are designed to be deep enough to cover the majority of applications, however on some stairs with very wide winding stairs a standard tread may not be deep enough.

Installing the connecting springs

simply glue the MDF connecting spring supplied into the rebate on the back of the tread you need to extend. Then cut the bullnose from a new tread apply some glue to the rebate and push the two treads together.



wipe off any excess glue immediately, and apply several strips of masking tape across the joint to prevent movement during drying once dry install as any other tread

Alternatively some Customers prefer a more visual break and use the top stair to landing transition profile to transition onto the half landing and then use the treads (minus the bullnose as described above)

Installing the top stair to landing transition pack


Measure the width of the stair nosing on the last step and saw the new stair head and aluminium profile to size



Apply glue into the groove of the new stair nosing and press the aluminium profile firmly into the groove

Secure the aluminium profile in place with masking tape whilst the glue sets

Apply glue onto the back of the new stair head and aluminium profile if appropriate and firmly press into place

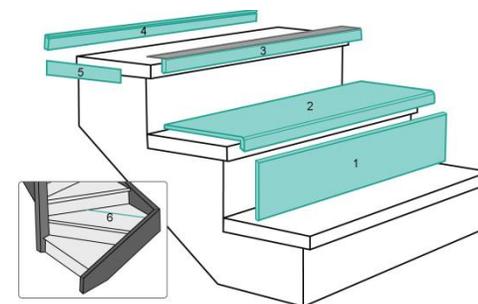

1. riser
2. tread
3. top stair to landing transition pack
4. open staircase profile
5. side cover
6. connecting springs

this is one of a series of installation guides which cover all aspects of installing Maestro-steps stair cladding all of which are available to download from our website
www.stairmakeoversolutions.co.uk

for further help, advice or information please contact us via e mail sales@stairmakeoversolutions.co.uk or phone us on 01507 463129